

OEMS | TIER ONE & TWO SUPPLIERS | MOD CENTERS

FEATURES

- One-, two- and four-pole snap action
- Long-life durability—1 million cycles
- Individual mount or matrix mount
- Crimp-pin, solder, or PC termination
- Indicator, momentary, or alternate action
- Light weight, short length
- LED or incandescent illumination
- Sunlight readable displays
- NVIS compatibility (all colors)
- Dripproof, splashproof, watertight seal, and solvent resistant options
- Common or split ground circuit configurations
- Qualified to MIL-PRF-22885/114

APPLICATIONS

- Commercial Aircraft
- Military Aircraft and Ground Vehicles
- Naval Systems / Submarine Controls
- Industrial Equipment and Control Systems
- Launch Controls



S100 Four-Pole Lighted Switch

The Series 100 provides high reliability in a lightweight package with NVIS compatibility, sunlight readability, LED or incandescent illumination, and water-tight/solvent resistant sealing.

stacosystems.com

S100

stacosystems™

SPECIFICATIONS

MECHANICAL

- ▶ Actuation force: 2–5 lb
- ▶ Actuation travel: 0.130" ± 0.030 "
- ▶ Mounting torque: 10 ± 2 oz in.

PHYSICAL

- ▶ Termination: crimp-pin, solder, or PC
- ▶ Length behind panel, solder: 1.74" ± 0.020 "
- ▶ Length behind panel, PC: 1.97" ± 0.020 "
- ▶ Length behind panel, crimp: 2.375" ± 0.030 "
- ▶ Mounting panel hole: 0.691 ± 0.004 "
- ▶ Weight: 0.98 –1.09 oz (varies per switch configuration)

ENVIRONMENTAL

- ▶ Operating temp: -40–71 °C
- ▶ Storage temp: -55–85 °C
- ▶ Thermal shock: MIL-STD-202
- ▶ Moisture: MIL-STD-202
- ▶ Salt spray: MIL-STD-202
- ▶ Sand & dust: MIL-STD-202 & MIL-PRF-22885
- ▶ Fungus: MIL-STD-454
- ▶ Shock: MIL-STD-202 & MIL-PRF-22885
- ▶ Explosion: MIL-STD-202
- ▶ Vibration: MIL-STD-202 & MIL-PRF-22885
- ▶ Shock-high impact: MIL-STD-901


DISPLAYS

- ▶ Standard fonts, Greek and math symbols, custom language and special artwork
- ▶ Full face and two-, three-, and four-way split face
- ▶ Hidden, lighted, and colored legends
- ▶ Colored, lighted, and black backgrounds

LED LIGHTING

- ▶ Voltage dimming available
- ▶ NVIS compatibility
- ▶ Source & sink applications
- ▶ Sunlight readable

FEATURES

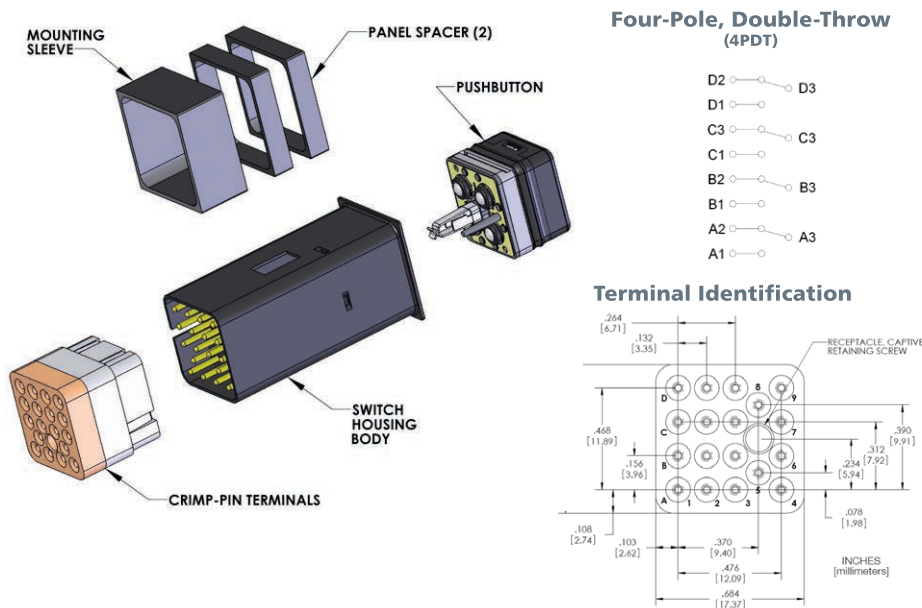

stacosystems™

Headquarters North America

7 Morgan, Irvine, CA, 92618
United States
p: 949.297.8700
f: 949.297.8789
e: sales@stacosystems.com

EMEA

p: +44 (0) 1538 529426
e: stacoemea@stacosystems.com

Asia/Pacific/Oceania

p: +612 9482 3707
e: stacointl@stacosystems.com

China

p: +86 139 5240 9082
e: stacochina@stacosystems.com